
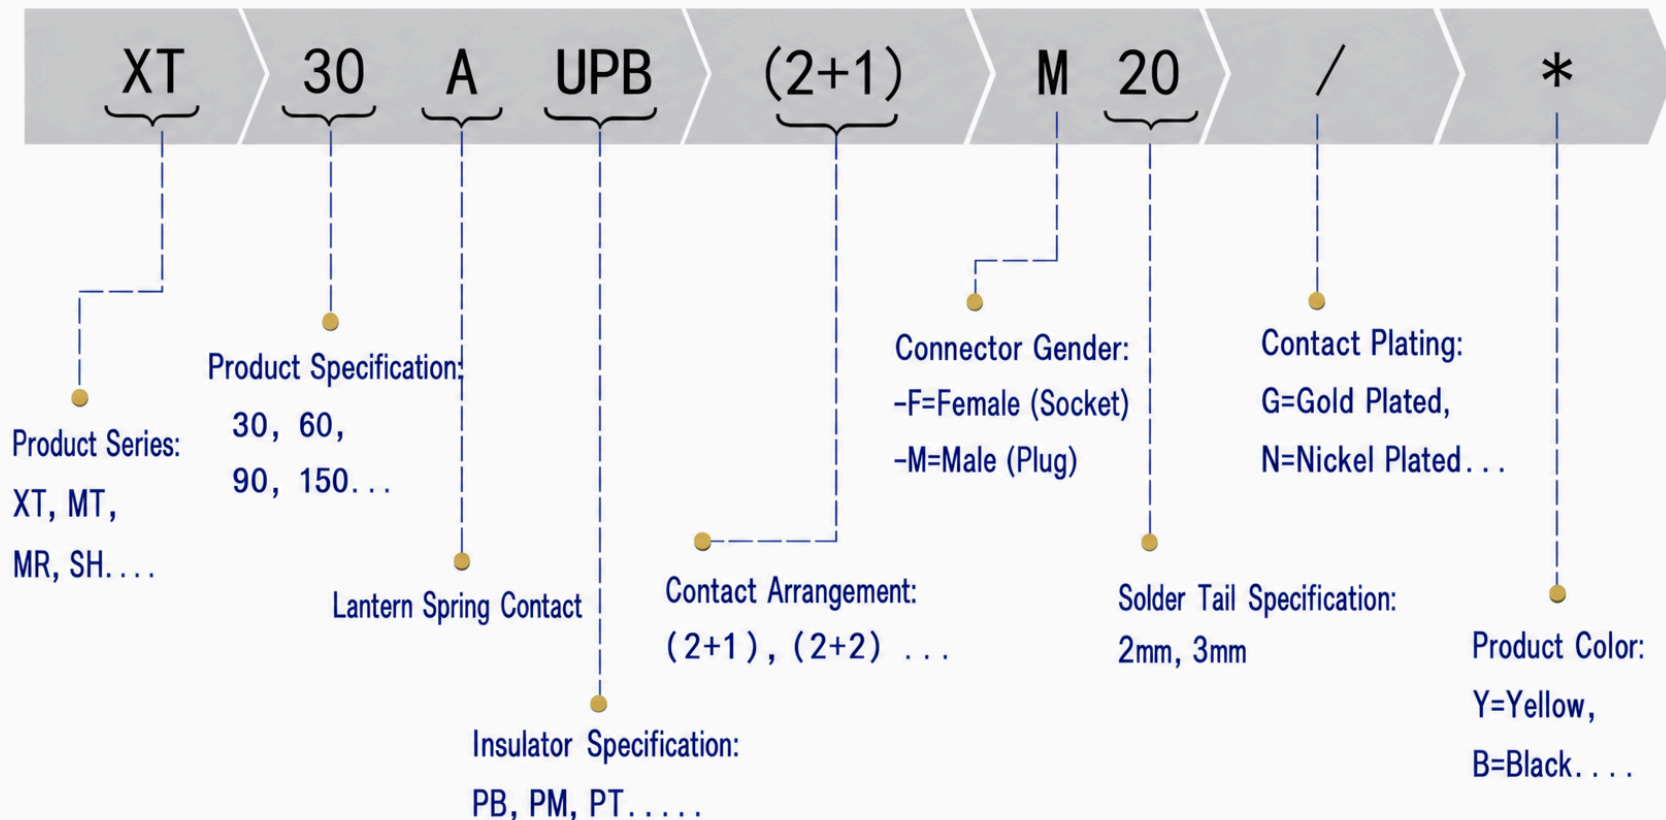


Model Description of Amass Products

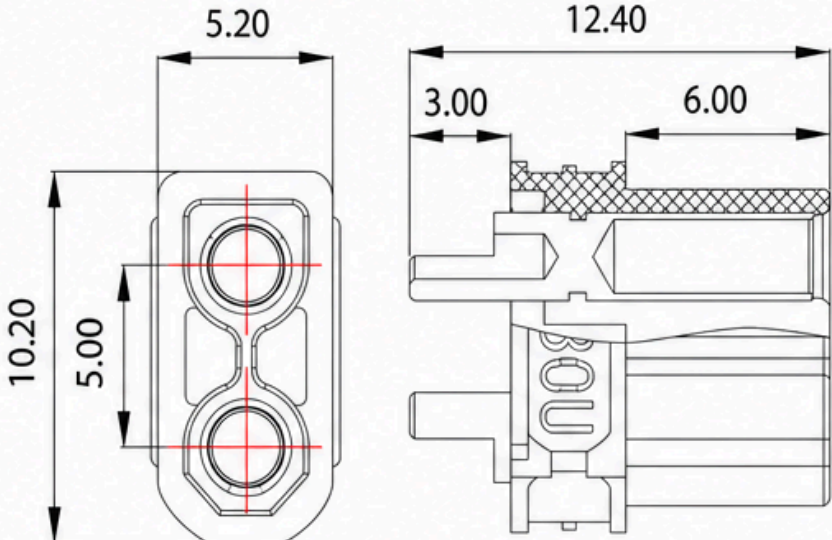

Item No. XT30U-F		Material & Parameter			
		Item No.	XT30U-F	Contact Resistance	0.70mΩ
		COLOR	2 3	Rated Voltage	DC 500V
Patent No. 201630055144.7		Metal Material	Brass Gold Plated	Rated Current	15A
Drawing		Plastic Material	PA	Momentary Current	30A
		Flammability FR LEVEL	UL94 V0	Use Times	1000 TIMES
		Recommend Use	Battery	Cable SPEC.	18AWG
		Certification	CE/UL	Operating Temperature	-20°C to 120°C